


# Mod<sup>®</sup> Electrolytic

## C-ET70-350-MOD

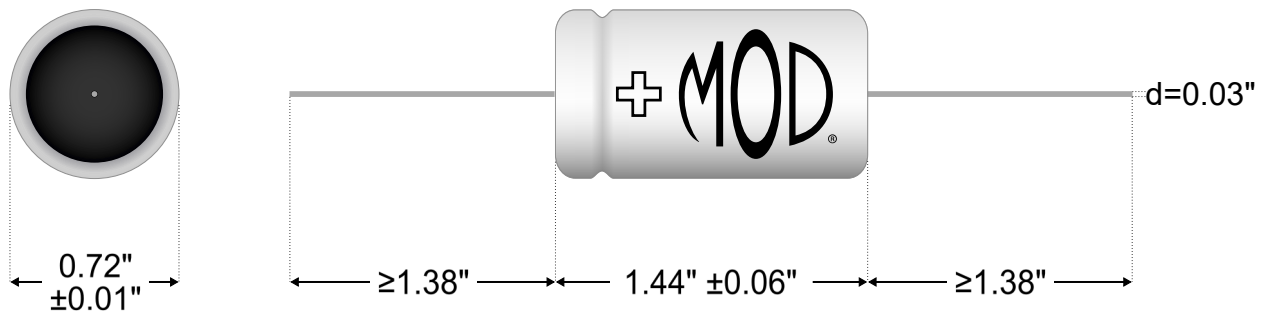

\*drawing not to scale

|                                 |  |
|---------------------------------|--|
| Type                            | Axial Leaded Electrolytic              |
| Capacitance                     | 70 $\mu$ F                             |
| Rated Voltage (DC)              | 350 V                                  |
| Tolerance                       | $\pm$ 20%                              |
| Load Life                       | 2000 hr at 105°C w/ 100% rated voltage |
| Surge Voltage (DC)              | 400 V                                  |
| Operating Temperature           | -25°C to +105°C                        |
| Leakage Current (after 2 min.)  | $\leq$ 490 $\mu$ A                     |
| Max. Dissipation Factor (120Hz) | 24%                                    |
| Max. Ripple Current (120Hz)     | 0.22 A at 105°C                        |

